Delock Riser Card PCI Express x1 to x16 with flexible cable 30 cm

Description

This PCI Express riser card by Delock is used to connect a PCI Express x16 card. The flexible cable allows a space-saving installation inside the computer case.

Note

For technical reasons, only one lane is available for data transmission at the PCI Express x16 slot.



Item no. 85762

EAN: 4043619857623

Country of origin: Taiwan, Republic of China

Package: Box

Technical details

- Connectors:
  1 x PCI Express x1 male +
  1 x SATA 15 pin power plug >
  1 x PCI Express x16 slot (1-Lane)
- Compatible to PCI Express V3.0
- Cable gauge:
  30 AWG data line
  18 AWG power line
- Colour: black
- OS independent, no driver installation necessary
- Cable length:
  data cable ca. 30 cm
  power cable ca. 15 cm
- Dimensions (LxWxH): ca. 115 x 18 x 20 mm

System requirements


© 2024 by Delock. All names and symbols mentioned here are property of the respective producer.
Printing errors, changes and errors excepted.

- PC with one free PCI Express x1 / x4 / x8 / x16 / x32 slot
- A free SATA receptacle on the power supply

Package content

- PCIe riser card

Images

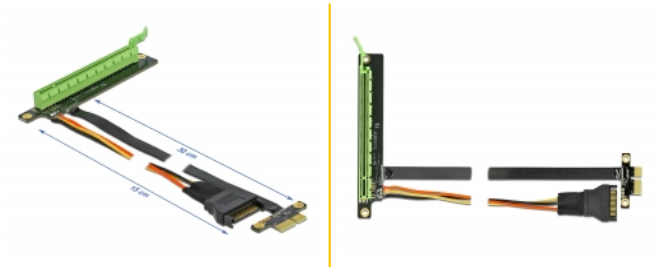

© 2024 by Delock. All names and symbols mentioned here are property of the respective producer.
Printing errors, changes and errors excepted.

General

Specification:	PCI Express 3.0
Style:	Flat cable

Interface

Connector 1:	1 x PCI Express x1 male 1 x SATA 15 pin plug
Connector 2:	1 x PCI Express x16 slot

Physical characteristics

Cable length:	15 cm 30 cm
Conductor gauge:	30 AWG data line 18 AWG power line
Length:	115 mm
Width:	18 mm
Height:	20 mm
Colour:	black

© 2024 by Delock. All names and symbols mentioned here are property of the respective producer.
Printing errors, changes and errors excepted.